


DuraRock Impactor

Ensure that your conveyor belt maintains a steady and efficient performance while transporting aggregates, crushed stone, tough rocks, sand, and gravel.

Within these applications, your belting could be subjected to gouging and abrasion, which have the potential to cause premature failures, operational downtime, and elevated maintenance expenses.

Meet the DuraRock Impactor, the remedy crafted to match your demands, built with the necessary strength and resistance to abrasion.

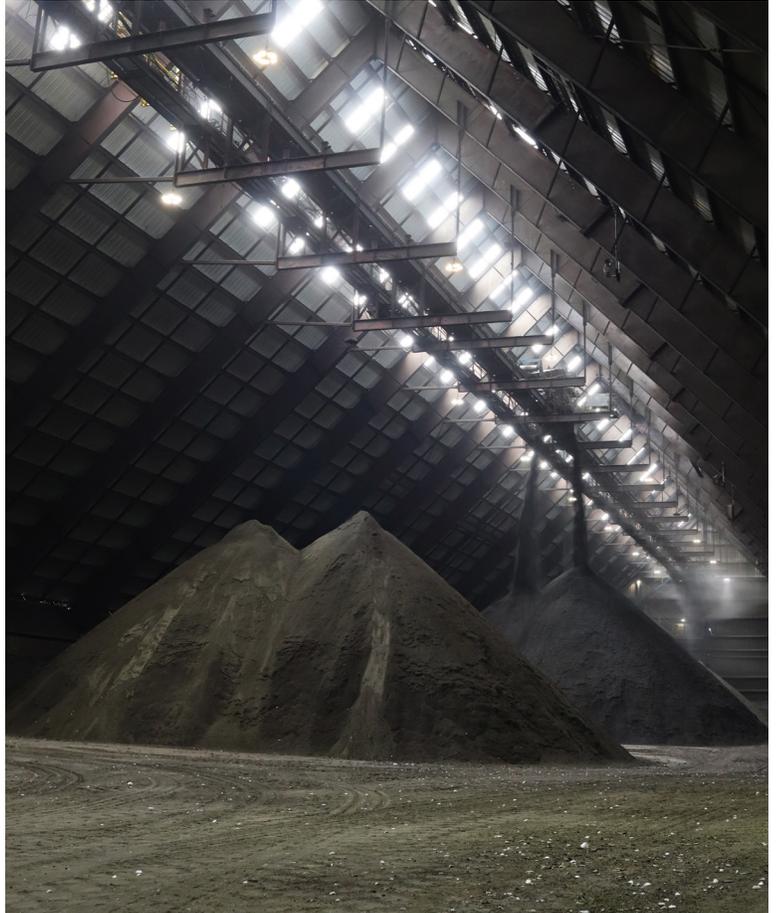

Belting Built to Mitigate Abuse from Rock, Aggregates, and Sand.

Reduce unforeseen operational halts arising from untimely belt malfunctions or eleventh-hour crises that disrupt your workflow. Leave behind the practice of reactive maintenance and embrace the peacefulness of uninterrupted operations facilitated by the Impactor, ensuring unwavering performance daily.

Explore the DuraRock Impactor, a distinguished offering from Duraline, supported by Viacore's wide network spanning more than 30 locations



Safeguard your operation with belting that has the cut-gouge and abrasion resistance you need.

Features and Benefits

Our DuraRock Impactor compound exceeding ARPM Grade I standards offers a carcass/cover combination designed to provide great performance under tough impact loading, while providing excellent abrasion resistance.

For additional properties and design considerations, please contact one of our Solutions Specialists.

DuraRock products are manufactured to Viacore's exacting standards. We control the specification, so that you get exactly what you need. You won't get a commodity product with properties determined by manufacturers out of touch with your requirements.

•**Tensile Strength:** Typical 2550 psi rubber tensile, great for withstanding higher rock impact forces, ripping and tearing, allowing extended belt life.

•**Abrasion Resistance:** Typical 115 mm³ din abrasion, that resists the sliding abrasiveness of smaller rocks, sands and aggregates, to extend the life of the cover and keep maintenance costs low.

•**Elongation:** Typical 450% rubber elongation giving it the flexibility to absorb impact and last over time in the dry aggregate environment.

•**Temp. Range:** -40 to 200°F*: Impactor will operate in harsh conditions.

**200°F based on lumpy material on ambient air systems with sufficient cooling on return side. If the material is considered fines and/or the system is enclosed and/or the belt is not able to cool down on the return side, the maximum temperature will be reduced and/or the expected life of the belt will be reduced.*

Scan the QR code or visit www.Viacore.com/contact-us to contact one of our Solutions Specialists today. You'll get:



•**An ultra-responsive single-source partner** spanning across North America with a network of more than 30 locations, we ensure comprehensive coverage wherever your operations are situated.

•**Extensive inventory & fast delivery** to minimize your downtime.

•**Over 350 highly trained service technicians** that handle all your installation and maintenance services to keep you up and running.

•**Over 50 years of experience.** You'll have access to the deepest pool of knowledge in the industry, we've got the solution to every challenge you face.